



NOTES:

1. IMPELLER TO BE .215/.125 FROM MOUNTING CUP TO IMPELLER.
2. SWITCH MUST MAKE CONTACT BETWEEN 1800-2500 RPM
AS SPEED INCREASES AND BREAK 50-500 RPM BELOW ACTUAL MAKE.
3. SWITCH MECHANISM TO GIVE QUIET OPERATION ABOVE 2500 RPM.
4. INDIVIDUAL PACK: PACK 1 PER CONTAINER, 120 MAX. PER PALLET,
PACKING ASSY. 87854000. 20 CARTONS PER LAYER, 6 LAYERS PER
PALLET. P.S. 88834200 AND P.S. 88834408.
BULK PACK: PACK 20 PER CONTAINER, 160 MAX. PER PALLET,
PACKING ASSY. 87854614. P.S. 88834200 AND 88834408.
5. CARTON LABELS MUST ALL FACE ONE DIRECTION TOWARD THE
OPEN END OF THE PALLET. SEE P.S. 88834408.
6. NO PACKAGING TAPE OVER CARTON LABEL.

APPLICATION		B	LA	FR	A	S	C	E	B	A
THERMALLY PROTECTED CLASS "B" INSULATION SEALED BALL BEARING		06	21	34	F	02	HC	9	0	0
		CUSTOMER FASCO DIST.								
		CUSTOMER PART NO. B23618								

LEAD MATERIAL:
18 GA. 125° C, 2/64 INSUL.
X-LINKED POLY, (1) WHT
(1) BLU, (1) BRN,
(1)RED, AND (1) BLK
8.00/6.00 IN. LONG
.56/.44 IN. STRIP

SWITCH LEADS:
18 GA. 125° C, 4/64 INSUL.
EPDM. ORN
(1) 9.50/7.50 IN. LONG
(1) 8.00/6.00 IN. LONG
.31/.18 IN. STRIP

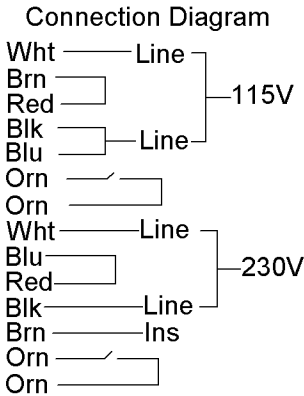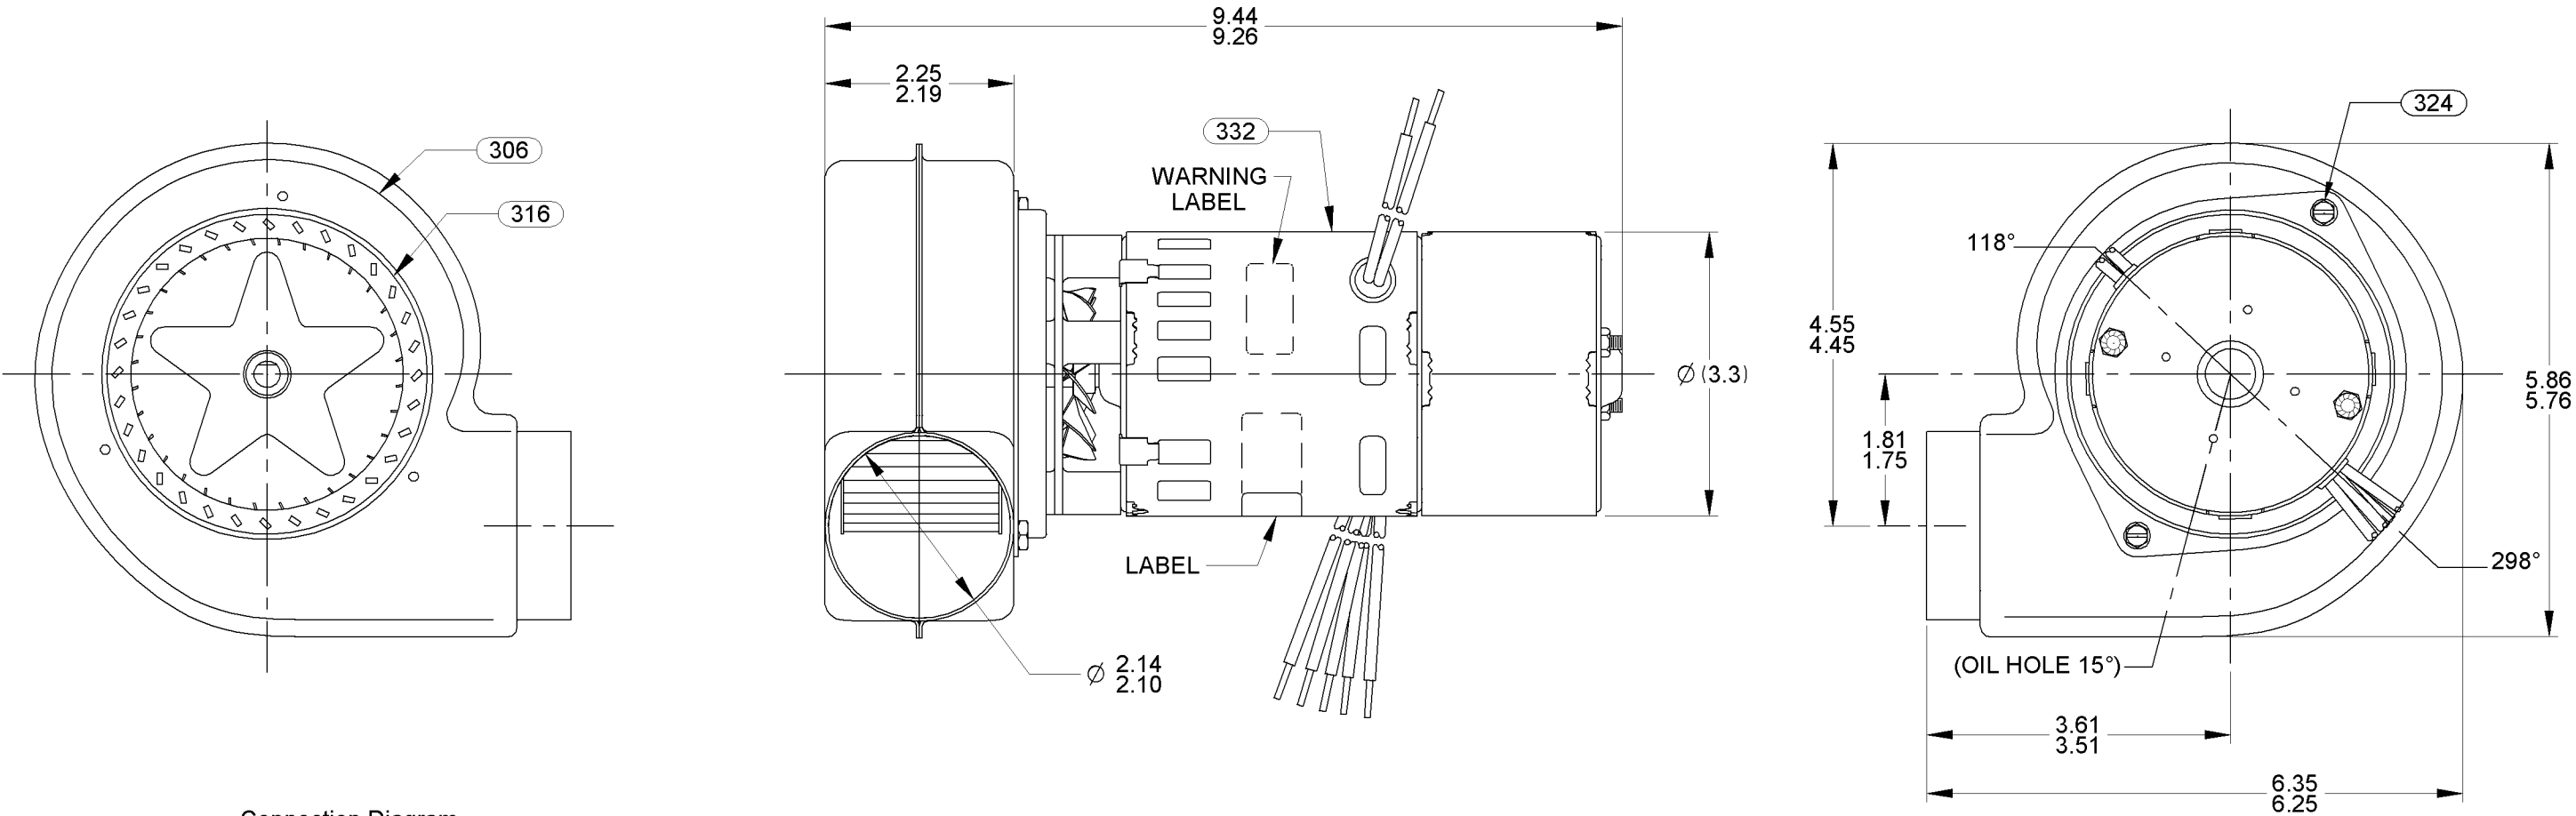

				TYPICAL PERFORMANCE TEST DATA				IN FREE AIR		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:			 FASCO MOTORS GROUP AC MOTOR/BLOWER DIVISION		
				AT 115 VOLTS 60 HZ.						FRACTIONS ± 1/16	DECIMALS .XX ± .01 .XXX ± .005	ANGLES ± 1°	CONFIDENTIAL: DO NOT DUPLICATE OR DISCLOSE TO THIRD PARTIES WITHOUT WRITTEN PERMISSION OF FASCO MOTORS GROUP, AC MOTOR/BLOWER DIVISION.		
ECO. NO.	REV.	DATE	APPROVAL		R.P.M.	WATTS	AMPS	APPROVALS		DATE		TITLE			
4001273	50	03/01/11	KSA/SED		3106	68	.87	DRAWN	RPT	08/28/06		BLOWER ASSEMBLY			
4001565	51	03/31/11	MLM/PLA						CHECKED	PLA	08/28/06				
4008856	52	4/9/2013	KSA/SDM										SIZE B		DWG. NO. 7021 5932
4010881	53	12/3/2013	MLS/PLA	BLOWER WEIGHT 4.0 LBS.			END PLAY .XX/.XX	FINISH COLOR		BLACK		DO NOT SCALE DRAWING		SHEET 1 OF 1	